



# 1.0

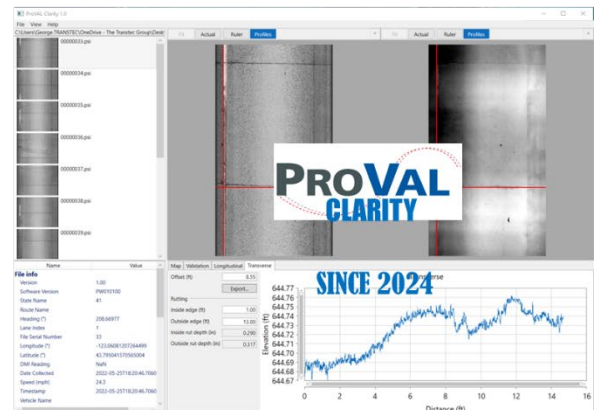

**PROVAL**  
**CLARITY**



## Transverse Pavement Profile Analysis



The Transtec Group

---

# ProVAL Clarity User's Guide

© 2024 The Transtec Group

6111 Balcones Drive

Austin, Texas 78731

Phone +1 (512) 451 6233 • Fax +1 (512) 451 6234

Email [info@RoadProfile.com](mailto:info@RoadProfile.com)

Web <https://www.roadprofile.com/>

# Table of Contents

INTRODUCTION .....	5
PROVAL CLARITY INSTALLATION .....	6
Download .....	6
Requirement.....	6
Installation .....	6
GETTING STARTED .....	7
Launching the program .....	7
Settings .....	8
Help .....	9
User's Manual .....	9
About .....	9
OPEN FILES .....	10
Use Open Menu .....	10
Use Recent Folders .....	12
VIEW FILES .....	13
Thumbnails.....	15
Select an Image .....	15
Open File Location .....	16
Refresh.....	16
File information.....	17
File Info.....	17
Intensity .....	18
Range.....	19
Intensity and Range Images .....	20
Fit .....	20
Actual .....	20
Pan .....	21
Ruler.....	22
Zoom .....	23
Scroll .....	24
Export.....	25

Profiles .....	29
Map .....	31
Validation .....	31
File Integrity .....	31
Header Correctness .....	31
Data Correctness .....	31
Longitudinal Profile.....	33
Profile .....	33
Offset.....	34
Export.....	35
Transverse Profile .....	36
Profile .....	36
Offset.....	37
Export.....	39
Rutting .....	40
View Valid and Invalid Data .....	41
Valid Data only .....	42
Invalid Data only.....	43
Both Valid Data and Invalid Data .....	44
BIBLIOGRAPHY .....	45
END USER LICENCE AAGREEMENT .....	46

---

# INTRODUCTION

ProVAL Clarity is an engineering software application that allows you to view and analyze transverse pavement profiles in many ways. Version 1.0 focuses on the import/export, viewing, and verification of 2D/3D pavement image files in the AASHTO MP 47 format.

AASHTO (2024), Standard Specification for File Format of Two-Dimensional and Three-Dimensional (2D/3D) Pavement Image Data, AASHTO Designation: MP 47-24, American Association of State and Highway Transportation Officials.

The current and future ProVAL Clarity is expected to enable state agencies, industry, and academics to view, validate, analyze, and share pavement images stored in the standard data format. The software tools would allow states to verify image quality and improve their data quality management plans and practices.

Access to image sets is expected to improve the pavement evaluation community's ability to analyze images for non-cracking features like macrotexture, potholes, and edge conditions. Pavement performance research may be enhanced by comparing images collected by various equipment over long periods.

Experience gained from more extensive 2D/3D imagery use would improve the AASHTO MP 47 standard.

The purpose of this document is to describe all software operations and software/hardware requirements for ProVAL Clarity.

From the ProVAL Development Team

The Transtec Group, Inc.

6111 Balcones Drive, Austin, Texas 78731 USA

+1 (512) 451-6233

Quick Links:

- ▶ Technical Support: <https://www.roadprofile.com/proval-support/>
- ▶ Disclaimer: <https://www.roadprofile.com/disclaimer/>
- ▶ Privacy Policy: <https://www.roadprofile.com/privacy-policy/>

---

# SOFTWARE INSTALLATION

## Download

ProVAL Clarity can be downloaded from the link provided by the ProVAL team or on the RoadProfile.com website.

---

## Requirement

While ProVAL Clarity should run on any system from the past several years, we recommend at least the following for the most pleasant experience:

- ▶ 2 GHz processor,
- ▶ 4 GB RAM,
- ▶ 1920x1080 display resolution.

The installation itself does not require administrative privileges, but it is possible that a computer's security policy is configured to not allow the installation. If this happens, please contact the person(s) responsible for the managing your computer.

Microsoft .NET 6 Desktop Runtime is required. The ProVAL Clarity installation will not check for this requirement. Installing .NET 6 does require administrative privileges.

<https://dotnet.microsoft.com/en-us/download/dotnet/6.0>

---

## Installation

Run the installation kit and follow the on-screen instructions.

---

# GETTING STARTED

## Launching the program


Launch ProVAL Clarity by locating **All Programs » ProVAL Clarity 1.0**.

The opening screen is simple.




## Settings

Click the File from the menu and select Settings.

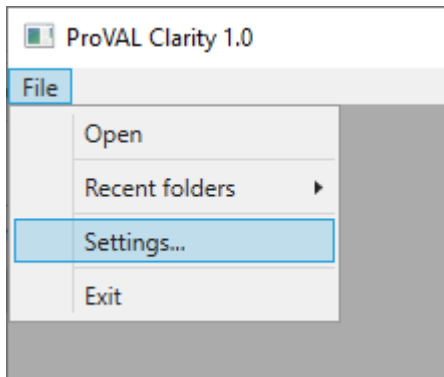

The Settings screen allows you to select unit system and provide reporting of errors, etc.

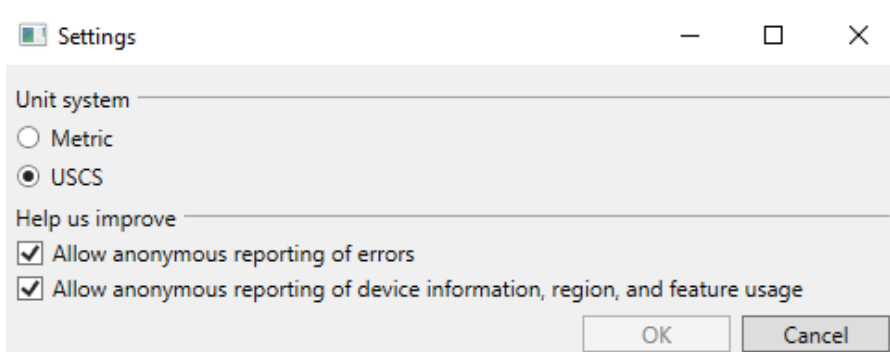


This gives you a convenient way to specify preferences. The Welcome Wizard only shows once after each installation. You can also modify those settings later by using the Options dialog box.

## Help


### User's Manual

The User's Manual (this document) can be accessed using the Menu/Help/User's Manual.

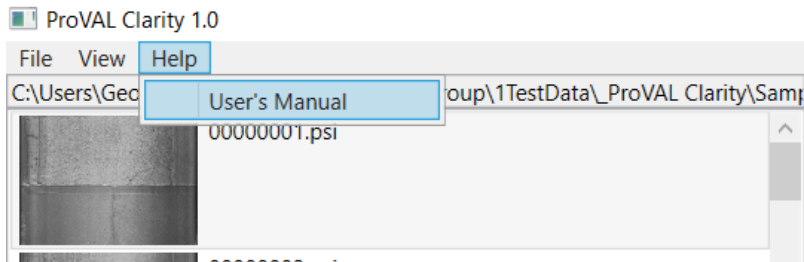

### About


Click the Menu/Help/About, and the About dialogue will appear.

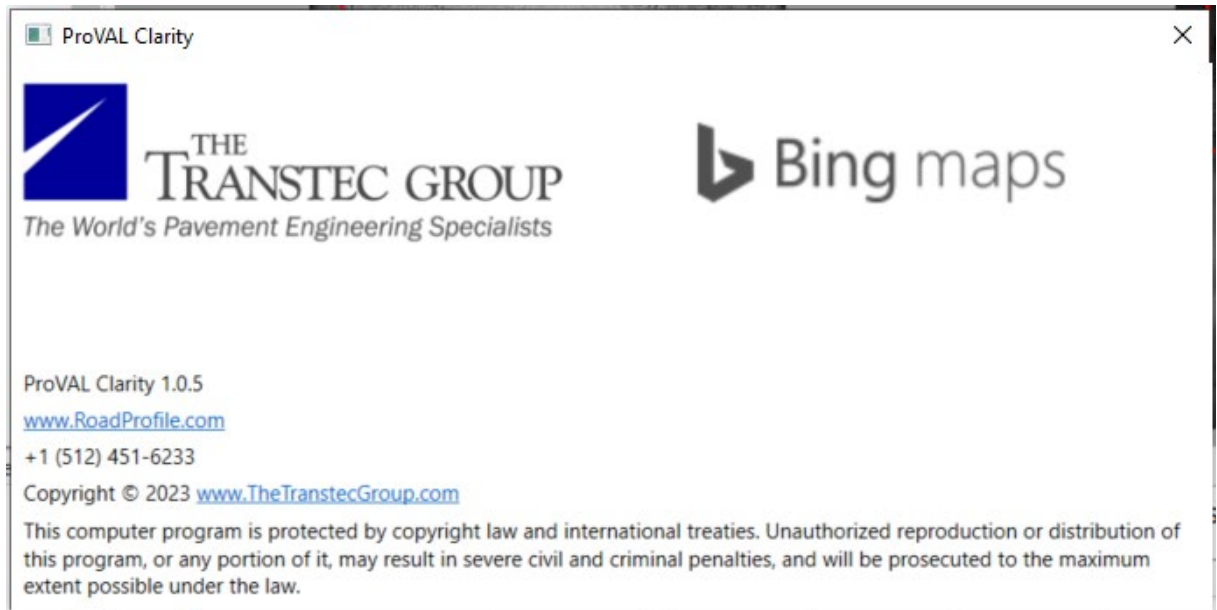


# OPEN FILES

## Use Open Menu

Use File/Open to launch a dialogue to select a file folder that consists of 2D/3D pavement image files in the AASHTO MP 47-24 PSI format.

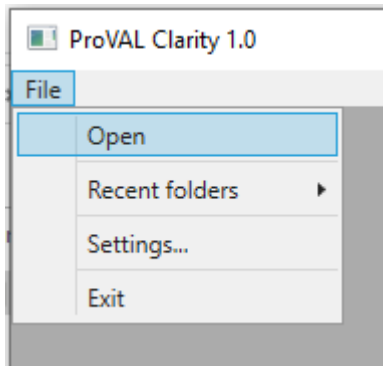


Click Select Folder for the data file folder.

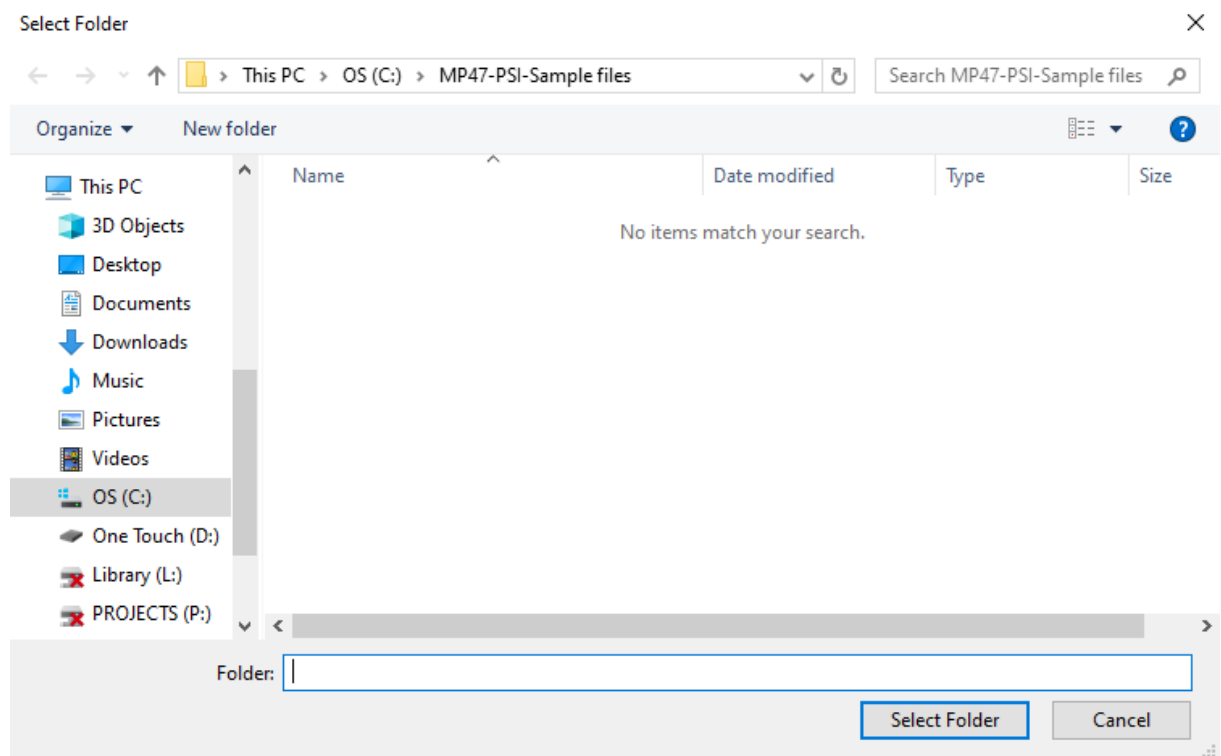

# ProVAL Clarity User's Guide


The thumbnails of data files will be shown on the upper left panel. You can then select any of the thumbnails for further viewing and analysis.

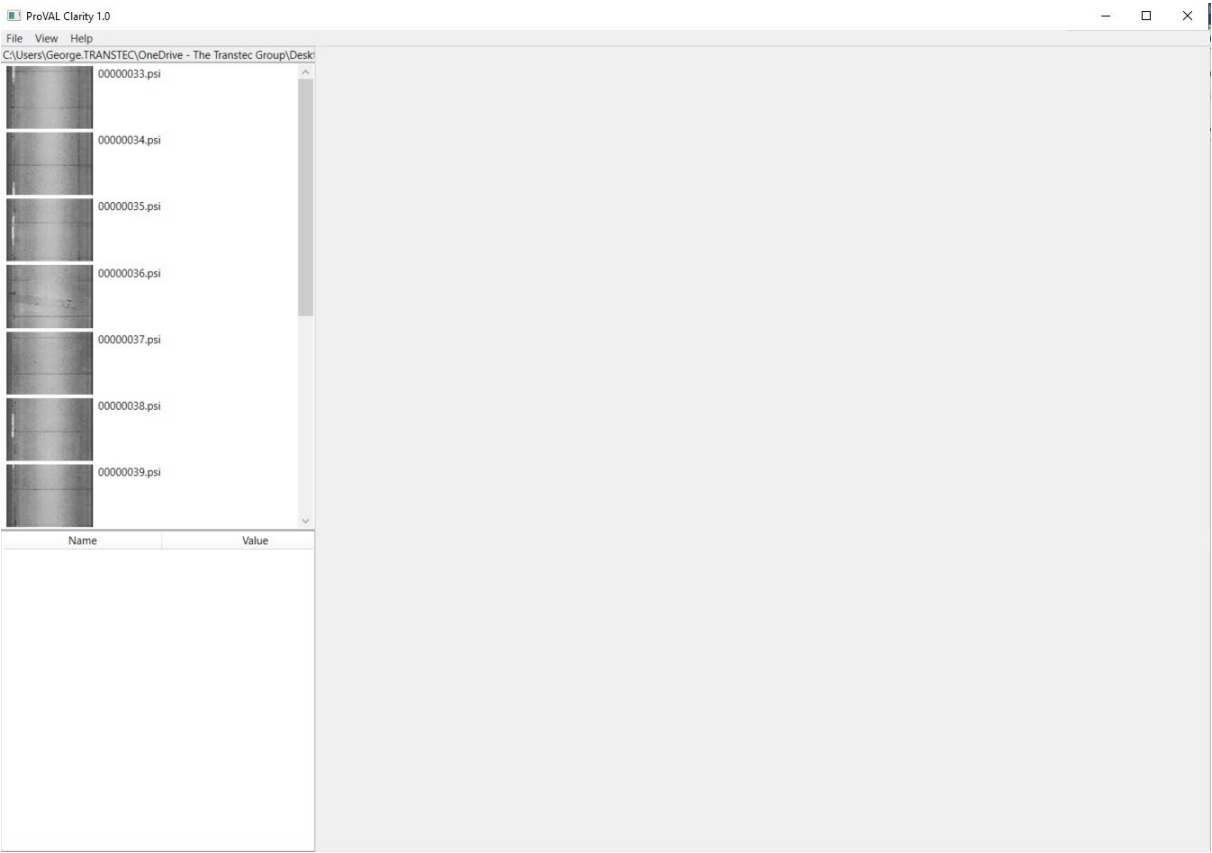

---


# Use Recent Folders

A convenient way to open files is to use the Recent folders.

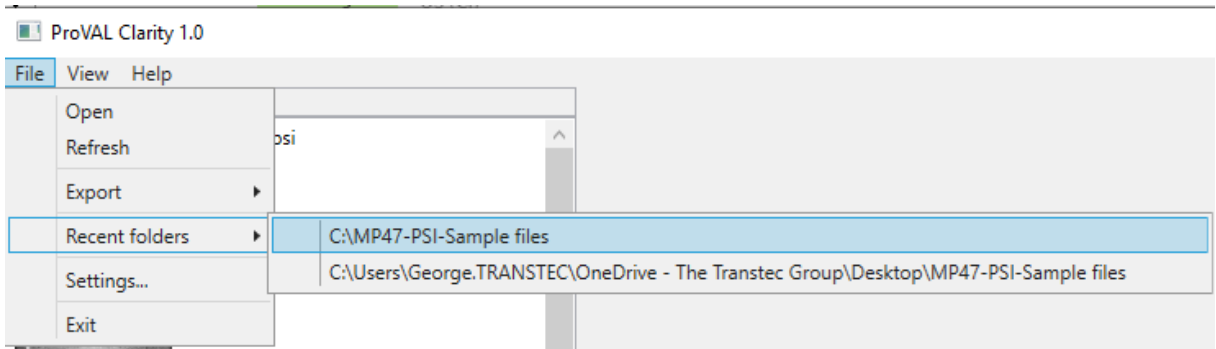


# VIEW FILES

After opening a file folder, the thumbnails of the file images would appear on the left panel.

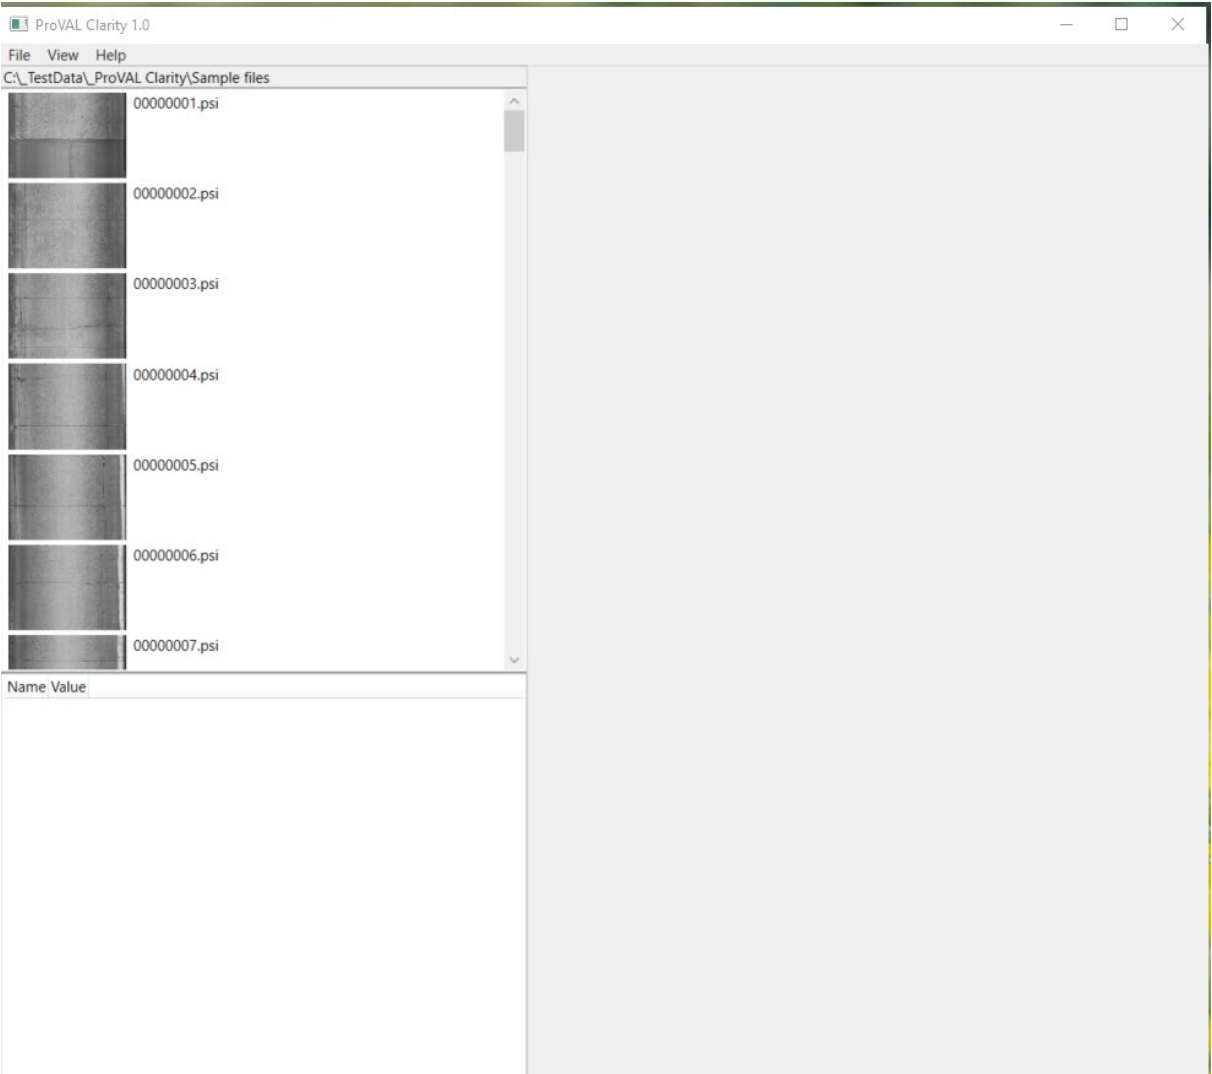

## ProVAL Clarity User's Guide

Click a thumbnail to view the image.

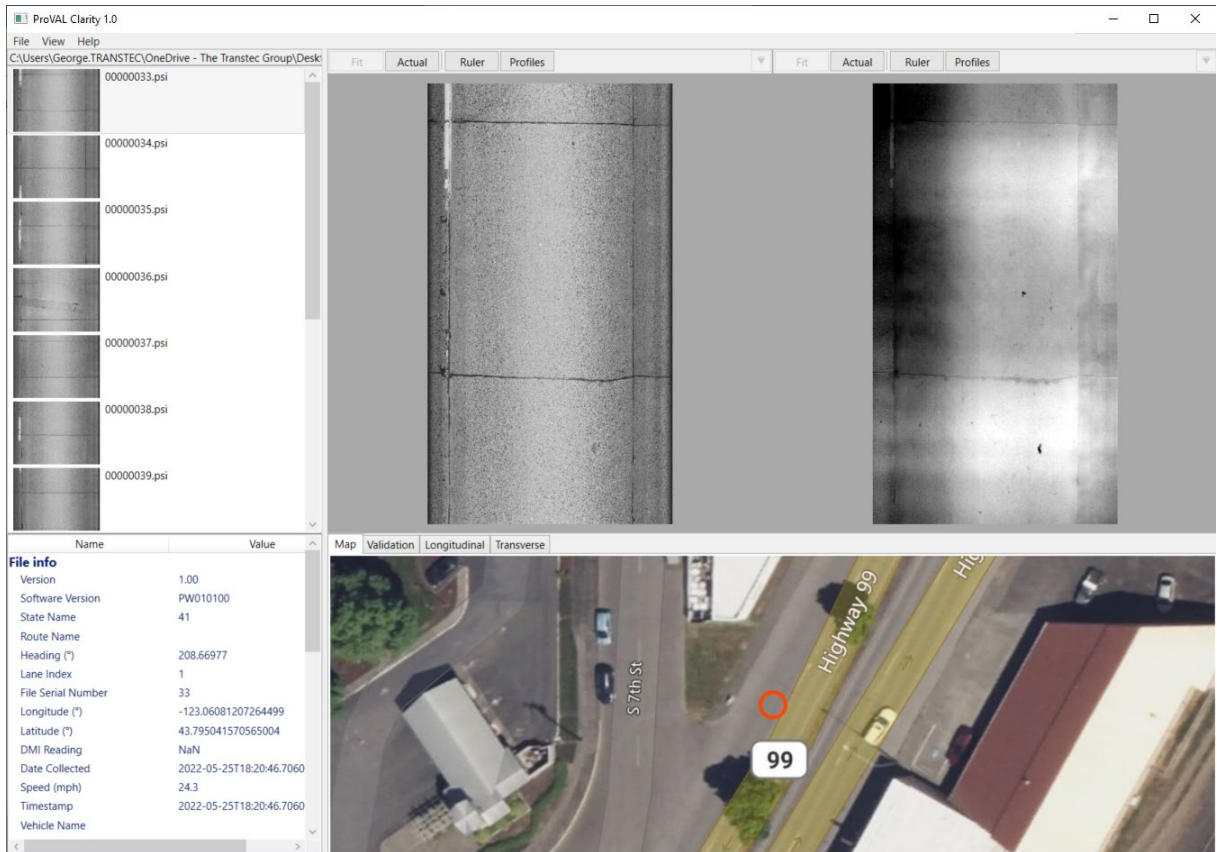

The screens include:

- ▶ Thumbnails: for image selection
- ▶ File information: File information of the selected image.
- ▶ Intensity/Range images: Display the 2D intensity and 3D Range images side-by-side.
- ▶ Map/Validation/ Longitudinal/ Transverse: display:
  - The map: A satellite map that indicates the image location.
  - Validation: Validation results of the selected image.
  - Longitudinal: Extracted longitudinal profile of selected cross sections.
  - Transverse: Extracted transverse profile of selected cross sections.

---

## Thumbnails

### Select an Image


The Thumbnails panel allows the user to select an image by clicking the desired image. Note that the thumbnail images are not scaled.

Files are displayed alphabetically in ascending order, as is common. The images are typically acquired in the reverse direction (i.e., traffic direction).



## Open File Location


By right clicking a thumbnail image, users can select Open file location to view the selected file in Windows Explorer.

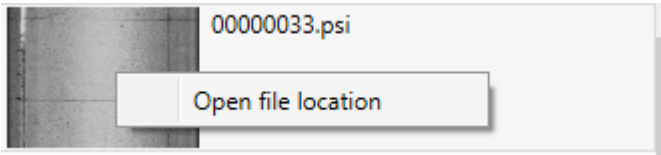

Name	Status	Date modified	Type	Size
00000033.psi	✓	11/7/2023 3:31 PM	PSI File	13,914 KB
00000034.psi	✓	11/7/2023 3:31 PM	PSI File	13,921 KB
00000035.psi	✓	11/7/2023 3:31 PM	PSI File	13,959 KB
00000036.psi	✓	11/7/2023 3:31 PM	PSI File	13,921 KB
00000037.psi	✓	11/7/2023 3:31 PM	PSI File	13,914 KB
00000038.psi	✓	11/7/2023 3:31 PM	PSI File	13,959 KB
00000039.psi	✓	11/7/2023 3:31 PM	PSI File	13,921 KB
00000040.psi	✓	11/7/2023 3:31 PM	PSI File	13,914 KB
00000041.psi	✓	11/7/2023 3:31 PM	PSI File	13,914 KB
00000042.psi	✓	11/7/2023 3:31 PM	PSI File	13,966 KB
00000043.psi	✓	11/7/2023 3:31 PM	PSI File	13,914 KB

## Refresh

Users can refresh the thumbnail view by selecting the menu File/Refresh.

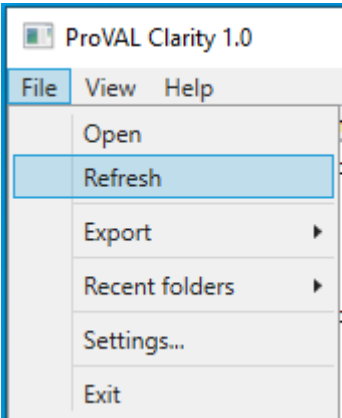

# File information

The File Info panel displays the detailed file information and intensity/range image properties.

## File Info

Name	Value
<b>File info</b>	
Version	1.00
Software Version	PW010100
State Name	41
Route Name	
Heading (°)	208.66977
Lane Index	1
File Serial Number	33
Longitude (°)	-123.06081207264499
Latitude (°)	43.795041570565004
DMI Reading	NaN
Date Collected	2022-05-25T18:20:46.7060
Speed (mph)	24.3
Timestamp	2022-05-25T18:20:46.7060
Vehicle Name	
Operator Name	
Contractor Name	

## Intensity

Note the difference between the 2D Longitudinal Resolution and 2D Transverse Resolution.

Properties Validation Map		
Name		Value
<b>Intensity</b>		
2D Pixel Storage Order		Row
2D Codec		BinUncompressed
2D Longitudinal Resolution (in)		0.171
2D Transverse Resolution (in)		0.069
2D Width (px)		2560
2D Length (px)		1855
2D Data Bit Depth		Depth8
2D Data Size		4748800
2D Compression Quality		0

Range

Note the difference between the 3D Longitudinal Resolution and 3D Transverse Resolution.

Range	
3D Pixel Storage Order	Row
3D Codec	BinUncompressed
3D Longitudinal Resolution (in)	0.171
3D Transverse Resolution (in)	0.069
3D Vertical Resolution (in)	0.001
3D Width	2560
3D Length	1855
3D Data Bit Depth	Depth16
3D Data Size	9497600
3D Compression Quality	0
Baseline Range Value (ft)	643.38

## Intensity and Range Images


### Fit

Display the scaled image that fits into the screen's panel.




### Actual

Display the actual, unscaled image.

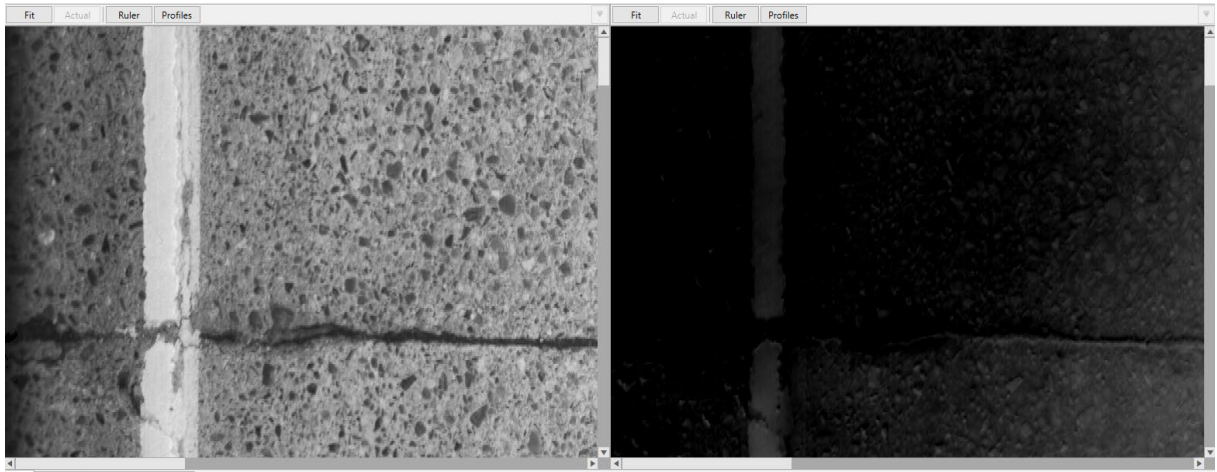


## Pan

Users can pan/move the image by holding the left mouse button and turning the pointer to a hand icon.

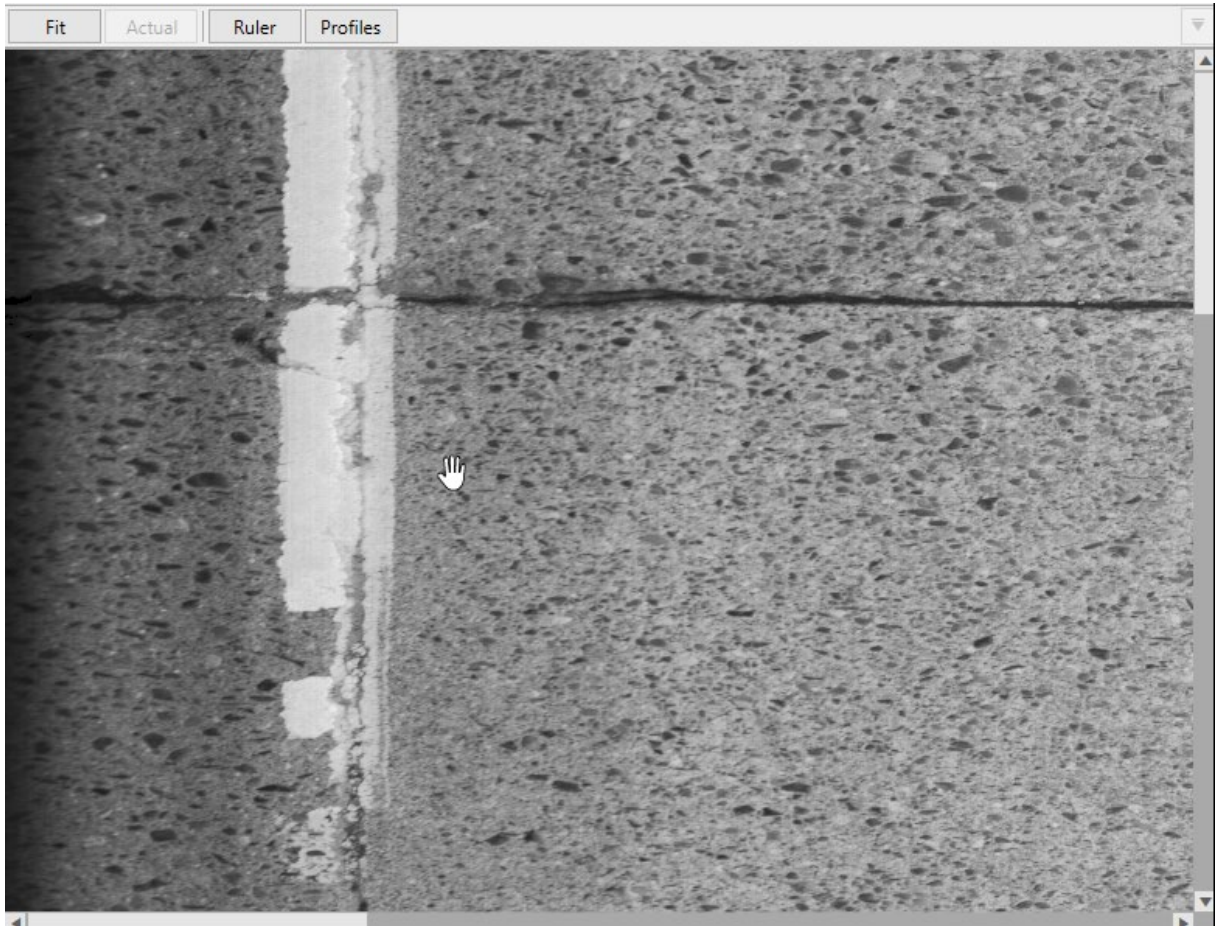

## Ruler


Users can use the ruler to select the locations on the image, and the total lengths between selected locations will be displayed. Users can use the Clear button to reset and select the locations again.

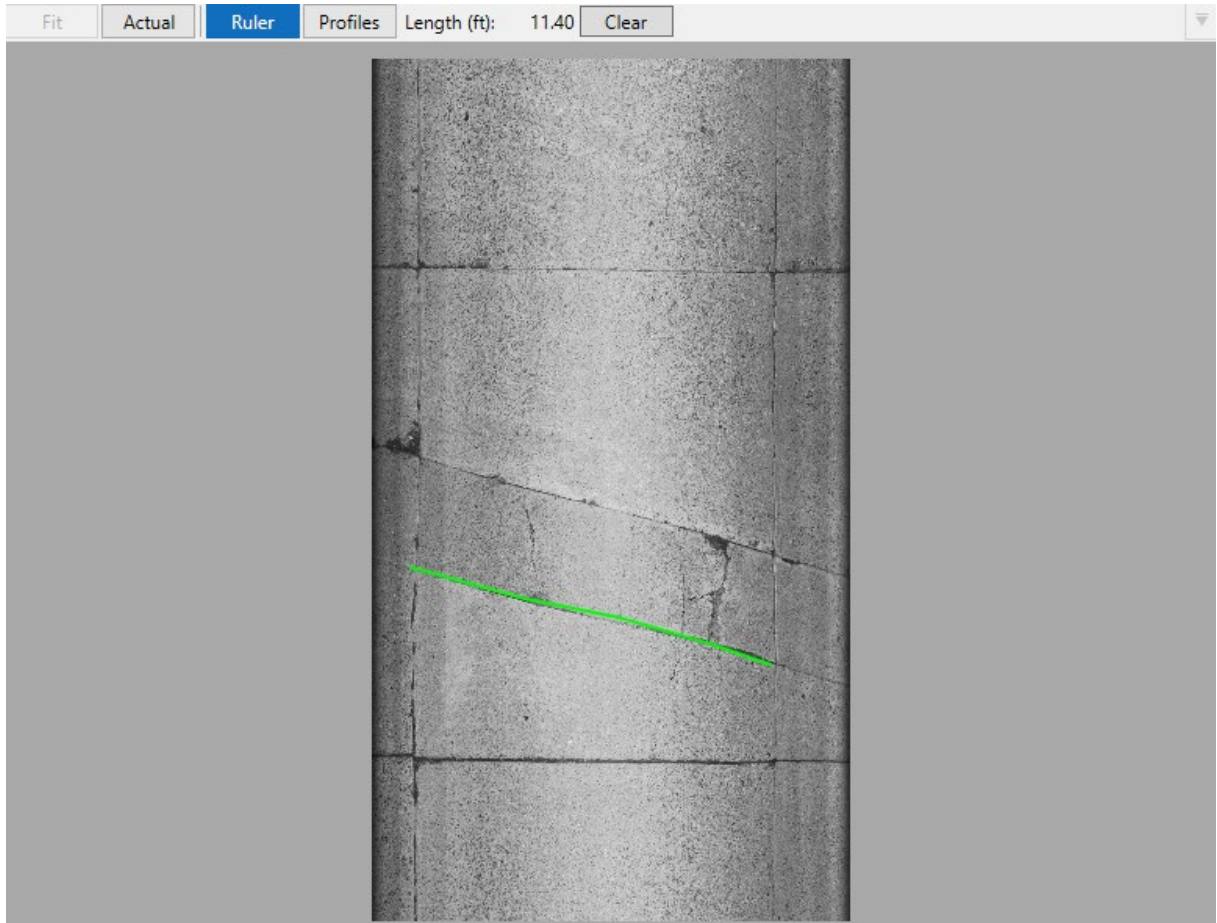

## Zoom

Users can zoom in or zoom out of the selected image (synchronized for intensity and range) by using the mouse's wheel.

Zoom out -

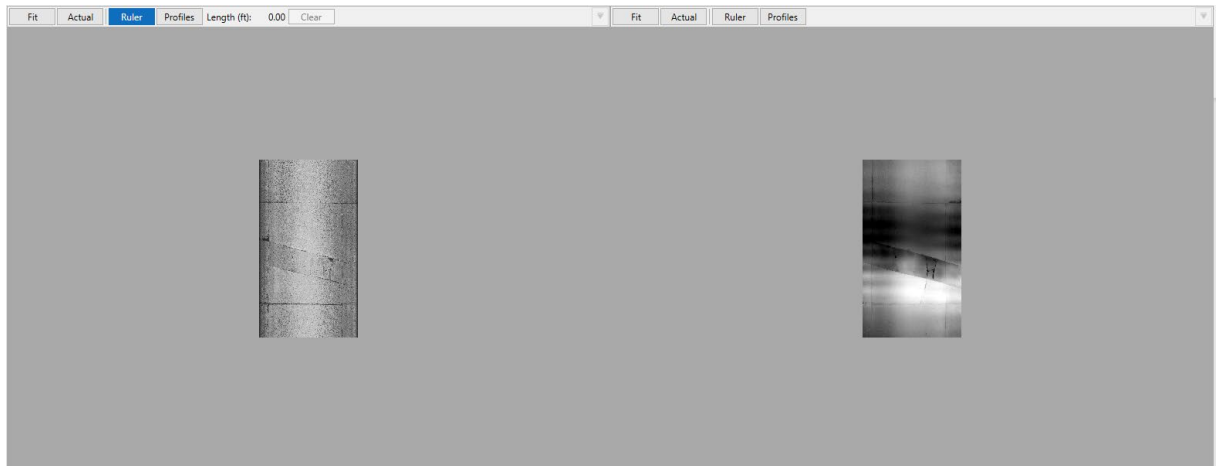


Zoom in -




## Scroll

Users can use the scroll bars or the keyboard arrows to scroll the selected images.

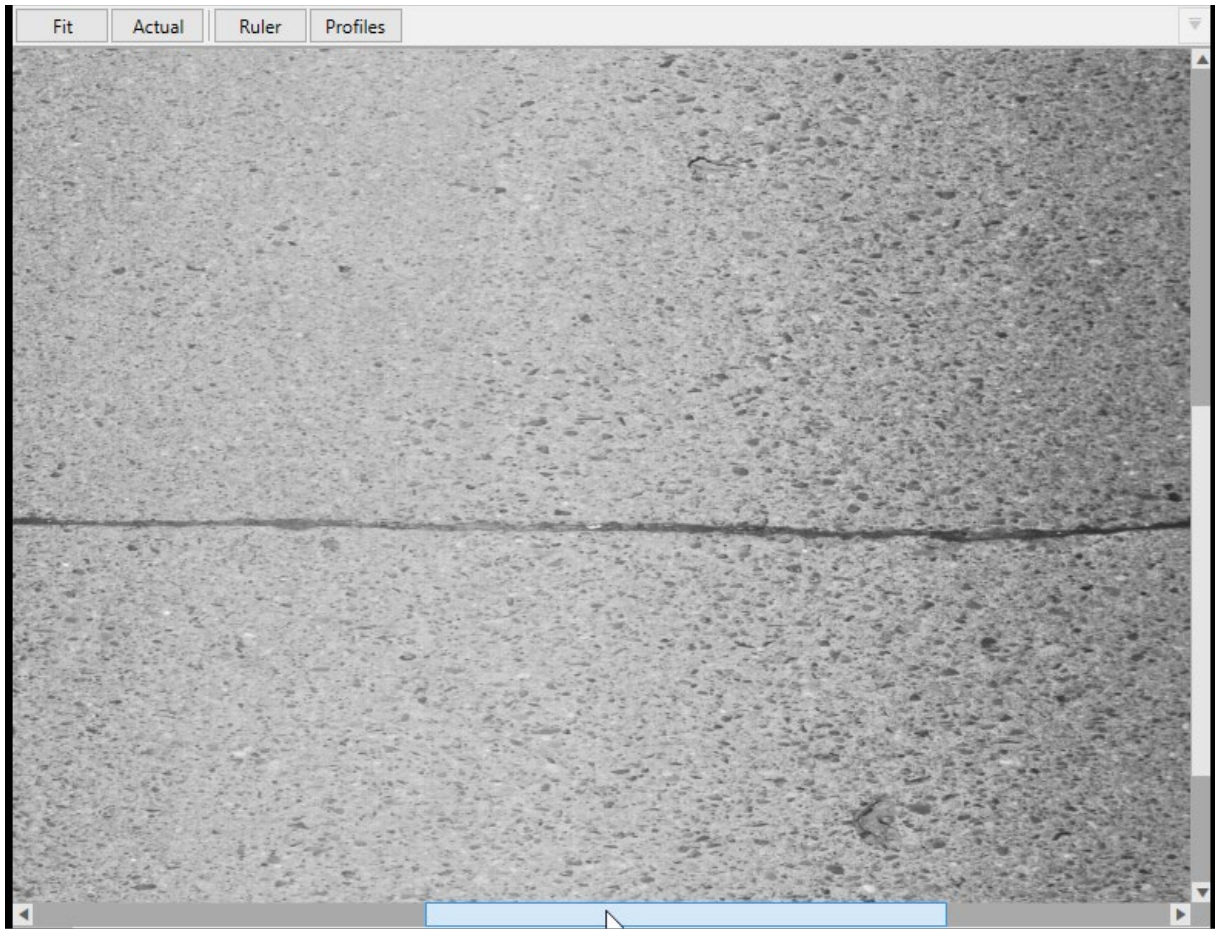


Export


While viewing a set of intensity and range images, users can export them to files by selecting the menu File/Export/Intensity image as... or File/Export/Range image as...:

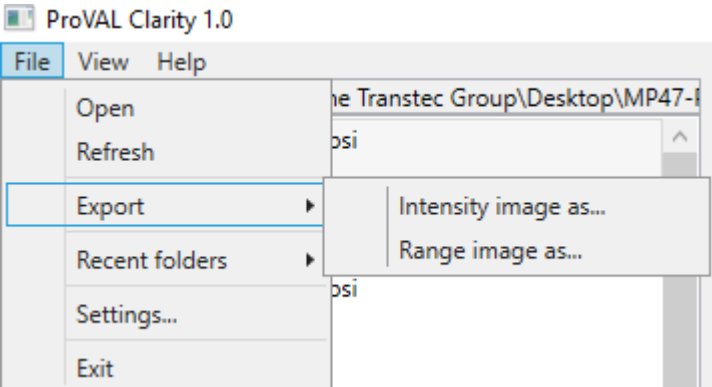

For the intensity image, users can select the export file option and determine the exported file name in a dialogue.

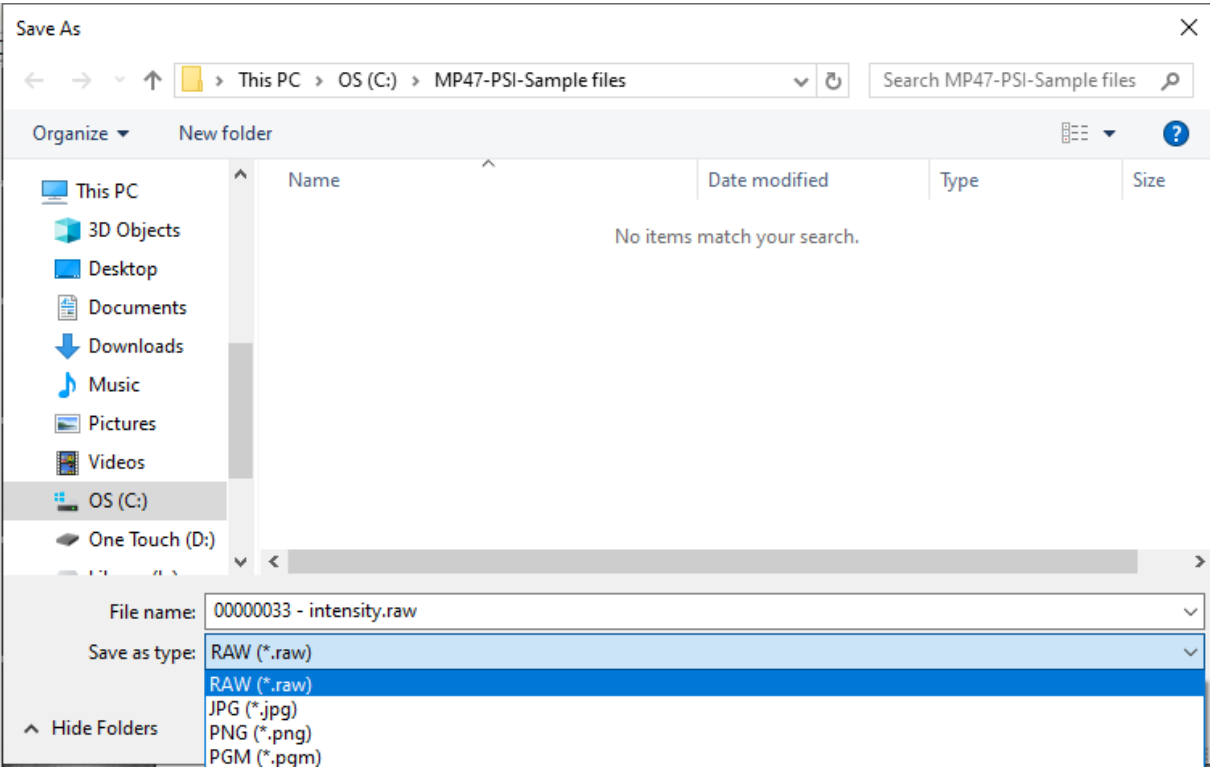


For the range image, users can select the export file option and determine the exported file name in a dialogue.

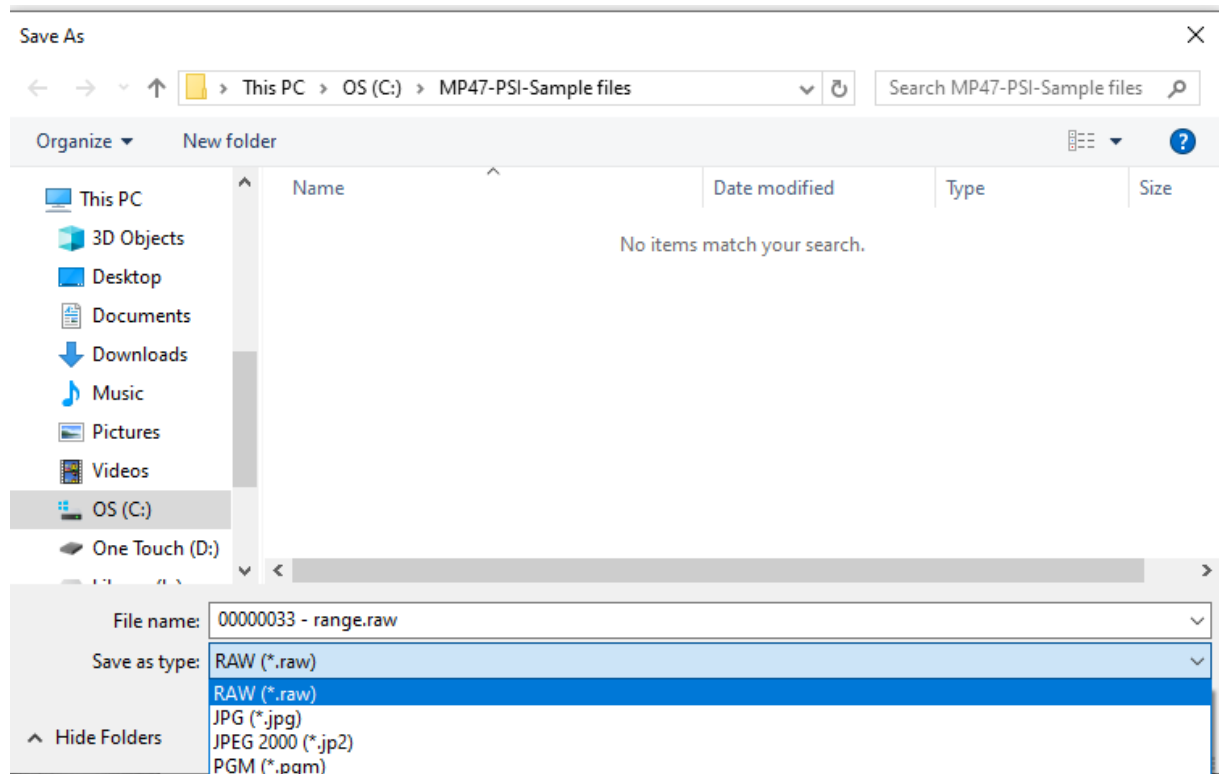

The options for exported file formats are:


- ▶ **RAW (\*.raw):** A RAW file is a binary data file that contains raw pixel data. Not to be confused with the RAW files from digital cameras. Because RAW files only contain pixel data, additional information must be provided to view the image, such as width and height. IrfanView is an example of software that can display raw files.  
([https://en.wikipedia.org/wiki/Raw\\_image\\_format#Raw\\_bitmap\\_files](https://en.wikipedia.org/wiki/Raw_image_format#Raw_bitmap_files))
- ▶ **PNG (\*.png):** A PNG file (Portable Network Graphic) is a versatile raster image format commonly used for web graphics, digital photographs, and images with transparent or semi-transparent backgrounds. PNG files can be viewed with Windows Default Viewer, web browsers, or other image viewer programs (e.g., Microsoft Paint, Adobe Photoshop, IrfanView, FastStone Image Viewer, XnView.)
- ▶ **JPG (\*.jpg):** JPEG or JPG (Joint Photographic Experts Group) is a widely used method of lossy compression for digital images. It's particularly popular for images produced by digital photography. JPG files can be viewed by almost all viewer programs.
- ▶ **JPEG 2000 (\*.jp2):** JPEG 2000 (JP2) is an image compression standard and file format developed by The Joint Photographic Experts Group (JPEG) in the year 2000. Its main objective was to improve upon the original lossy JPEG standard by introducing enhanced encoding algorithms, better scalability, and more efficient coding tools. JPEG 2000 files can be read with various viewer programs (e.g., Adobe Photoshop, IrfanView, FastStone Image Viewer, XnView).
- ▶ **PGM (\*.pgm):** A PGM file (Portable Gray Map) stores grayscale 2D images. A PGM file can be read with various image viewers (e.g., GIMP, Corel PaintShop Pro, Apple Preview). (This is probably the closest thing to an “official” spec:
- ▶ <https://netpbm.sourceforge.net/doc/pgm.html>)

Note that the graphic viewer program would display the images in a non-scaled manner, i.e., the difference in the longitudinal and transverse resolutions is ignored, such as the one below.

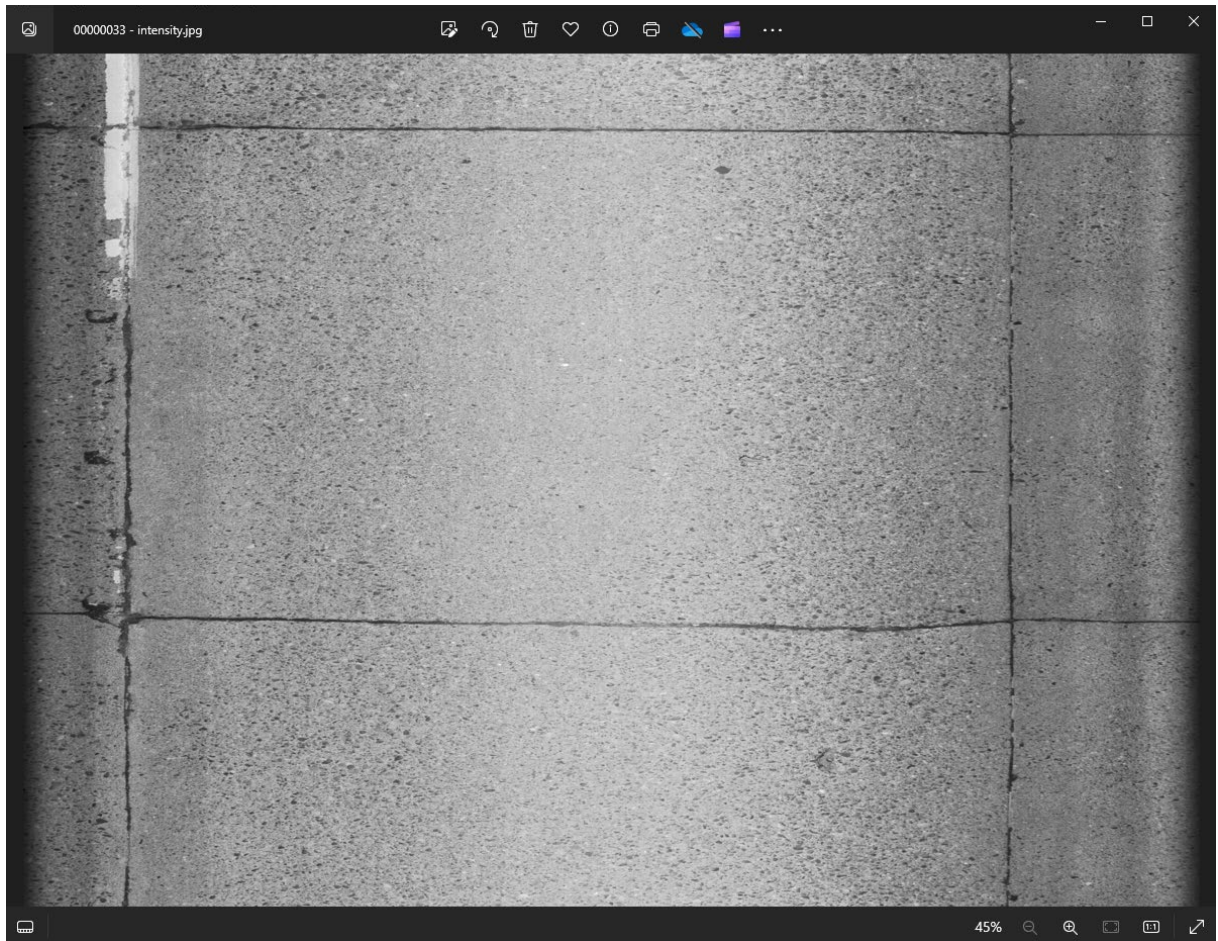


## ProVAL Clarity User's Guide

Compared with the correctly scaled version in ProVAL Clarity below:

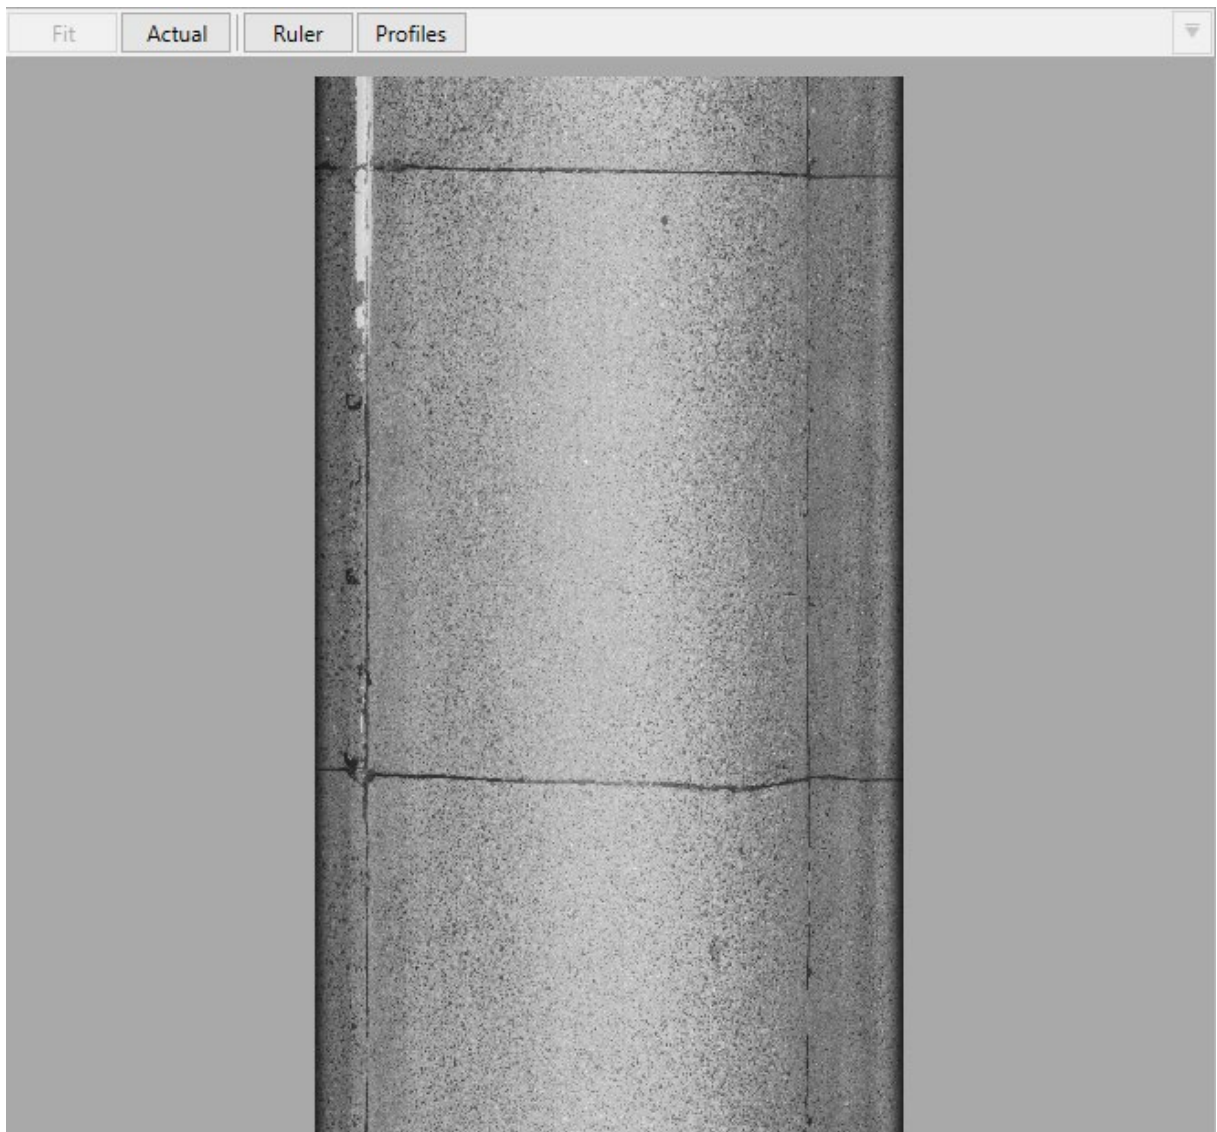

## Profiles


Users can use the mouse to select the location of the cross hairs to display the extracted longitudinal (bottom to top) and transverse (left to right) profiles from the range image.

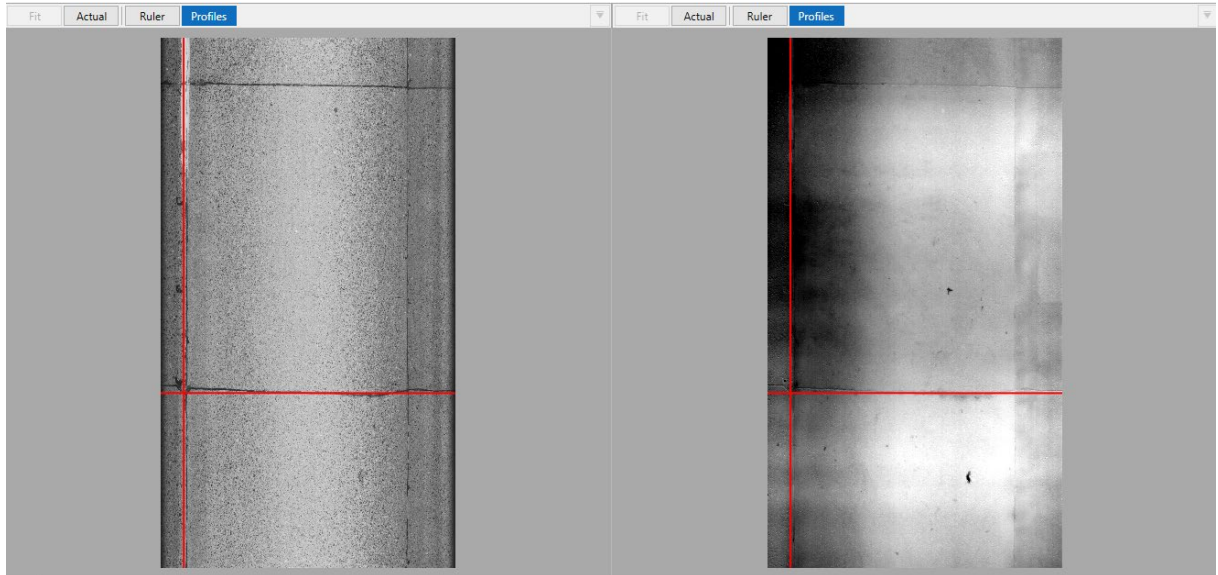

Though the cross-hairs are synchronized between the intensity and range images, it may be more intuitive to select the cross-hair position on the intensity image.

## ProVAL Clarity User's Guide

After selecting the cross-hair location in the image, users can click the Longitudinal tab of the bottom panel to display the extracted profile. The longitudinal profile elevation of the selected cross-section is displayed from the offset of the bottom edge to the top edge of the range image.

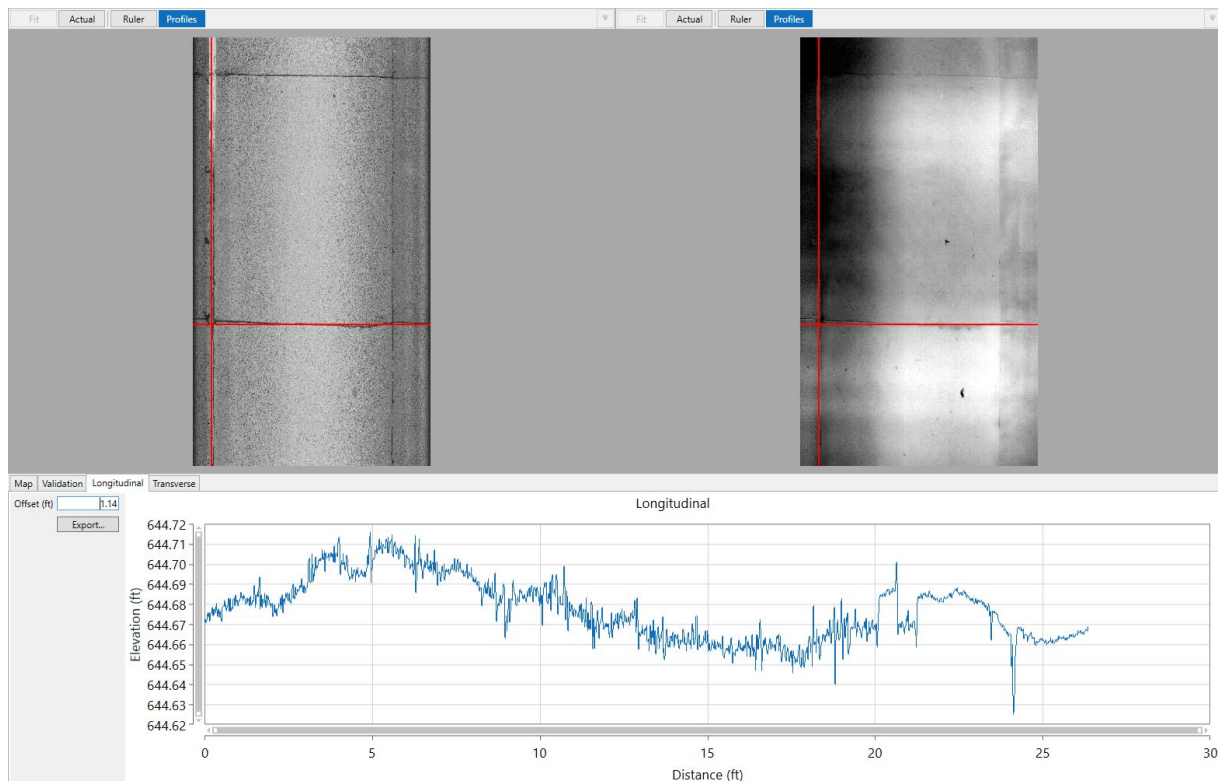


See the following sections for details of the extracted longitudinal and transverse profiles.

---

## Map

A satellite map is shown around the selected image location, which is indicated with a red circle.

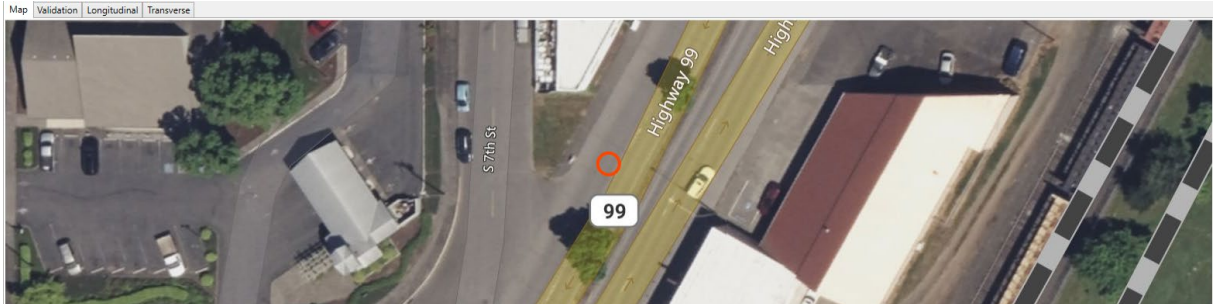

---

## Validation

The Validation shows the validation results based on the following checklist:

The checklist on the psi standard was recommended by Tsai et al. in 2019 and further refined in a personal communication on 12/7/2020, as follows.

### File Integrity

- ▶ The file signature is present. Check if the first 3 bytes of the file is "psi".
- ▶ The file trailer is present. Check if the last four bytes of the file is "@@@".
- ▶ The file's checksum equals the given one. If a checksum is given, calculate the checksum based on the file content and check if it equals the given checksum.


### Header Correctness

- ▶ The values in the required header fields are valid. For each value in required fields, if the field takes only the assigned value, check if the value is in the "assigned values list". For example, the version must follow the format "X.YY" where X and YY are the numbers.
- ▶ The size of the 2D/3D data is correct. If the data are not compressed, check if the following condition holds:  $\text{datasize} = \text{biddepth} / 8 * \text{width} * \text{length}$

### Data Correctness

- ▶ The data in the 2D and 3D sections can be extracted using header information. Extract and decode the 2D and 3D data using header-provided information. Check if the extracted data can fit into a width \* length data matrix of that given data type.


The example below shows no issues detected.

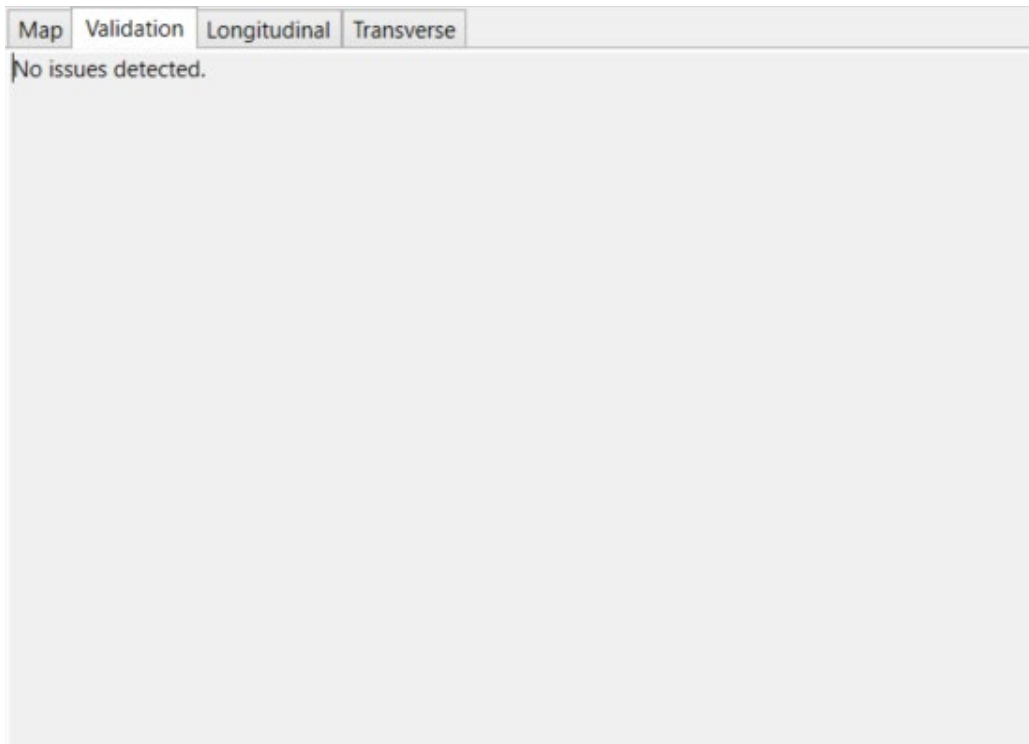

# Longitudinal Profile


## Profile

The longitudinal profile elevation of the selected cross-section is displayed from the offset of the bottom edge to the top edge of the range image.

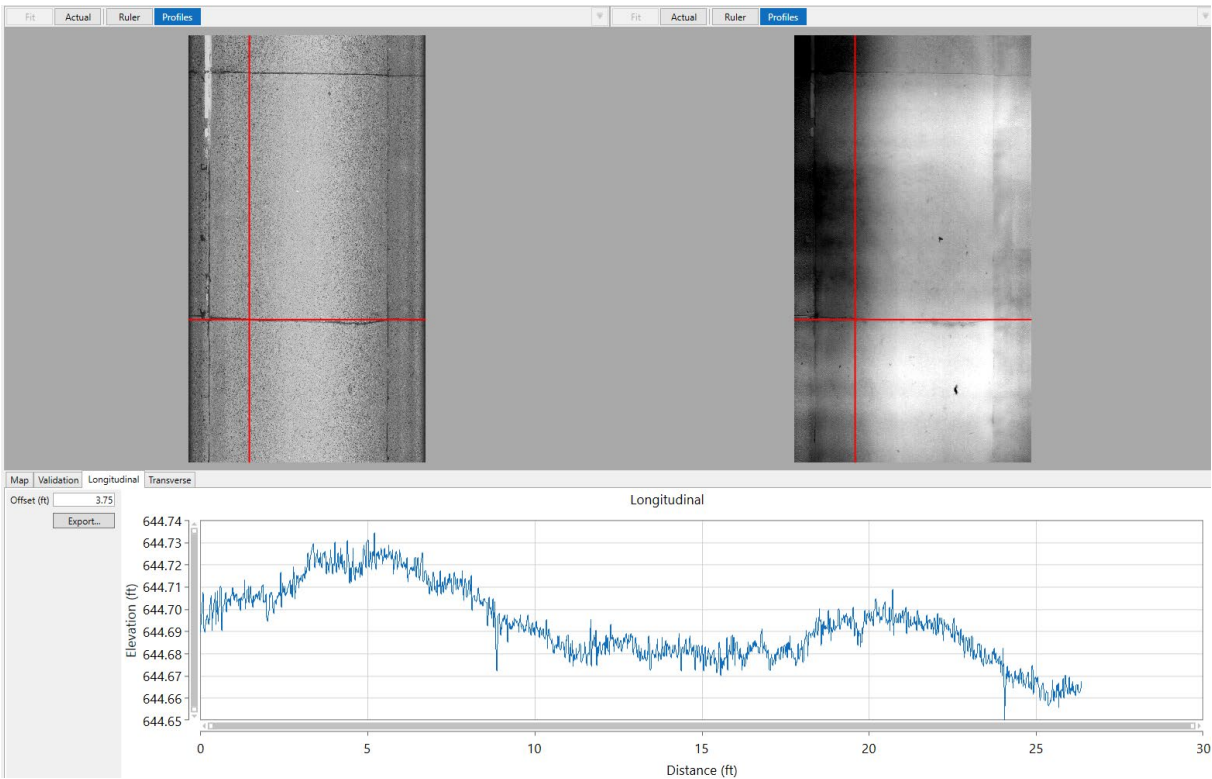


## Offset

For the longitudinal profile, the offset is the distance from the left edge of the range image to the selected cross-hair.

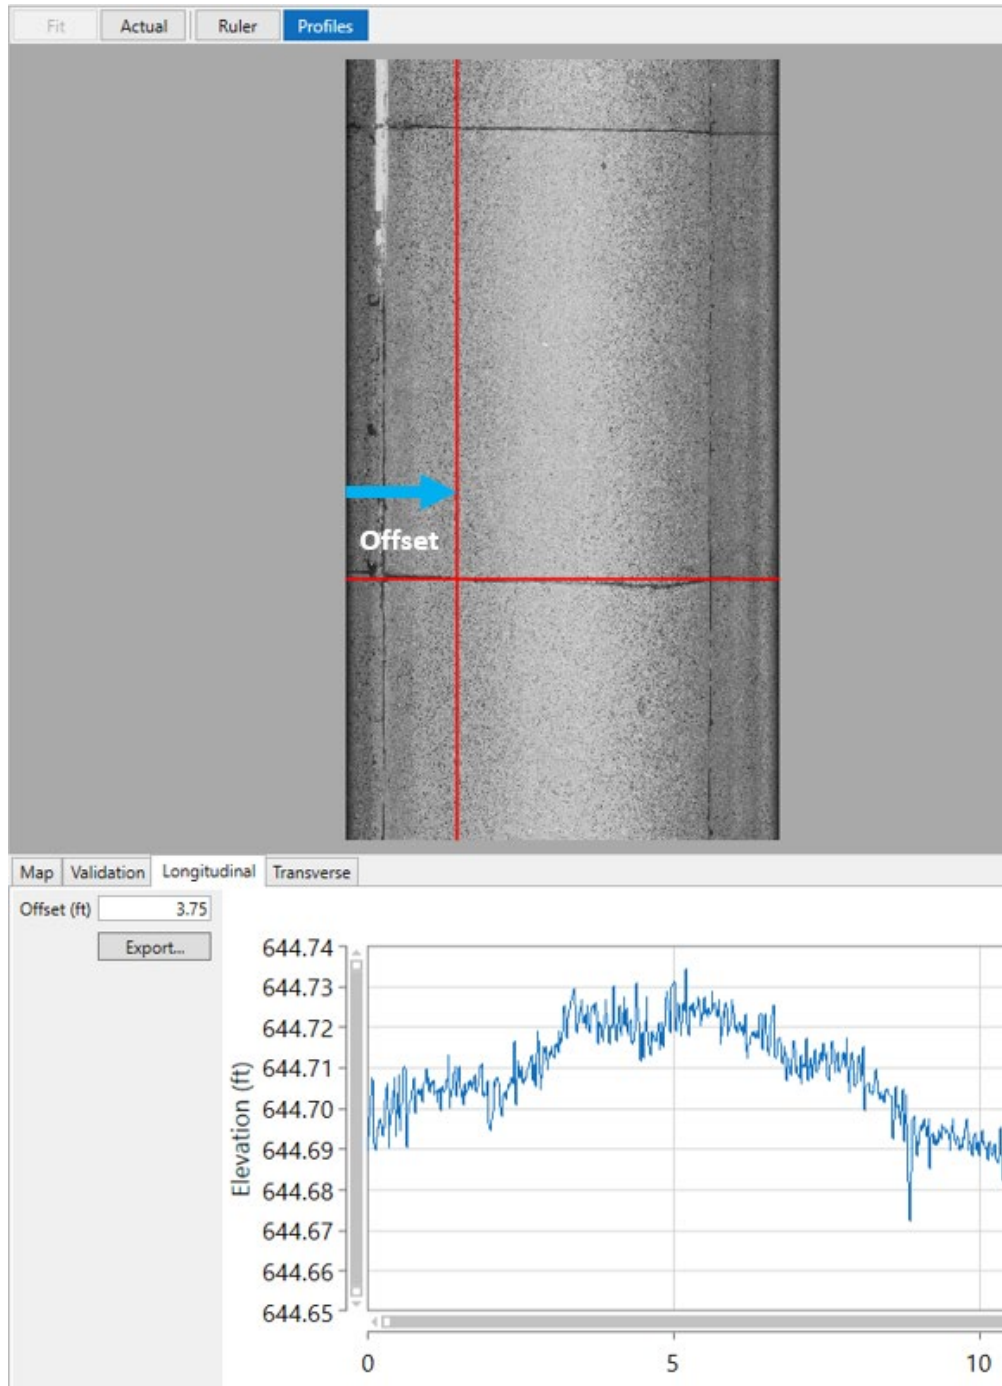

Export


Users can click the Export button to export the profile in the ASTM E2560 pavement profile (\*.ppf) format or tab-delimited file (\*.tsv) format. The longitudinal ppf file can be imported to ProVAL.

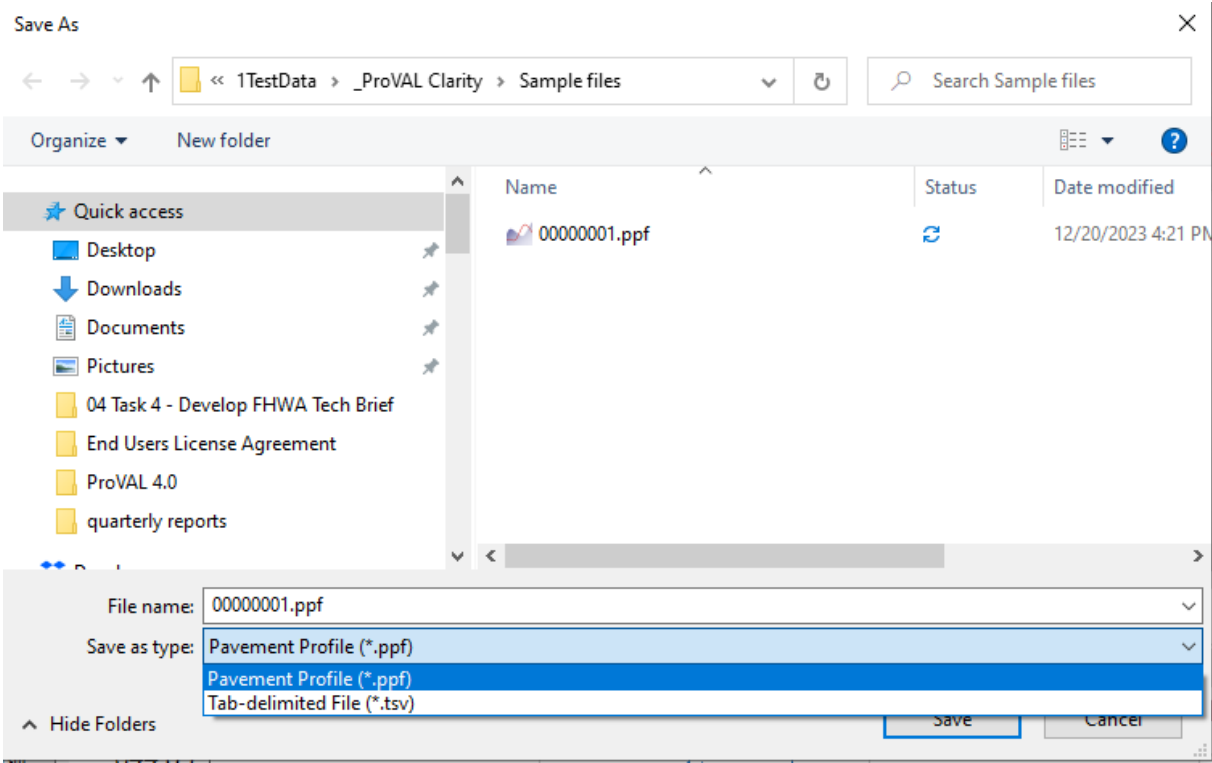

# Transverse Profile


## Profile

The transverse profile elevation of the selected cross-section is displayed from the offset from the left edge to the right edge of the range image.

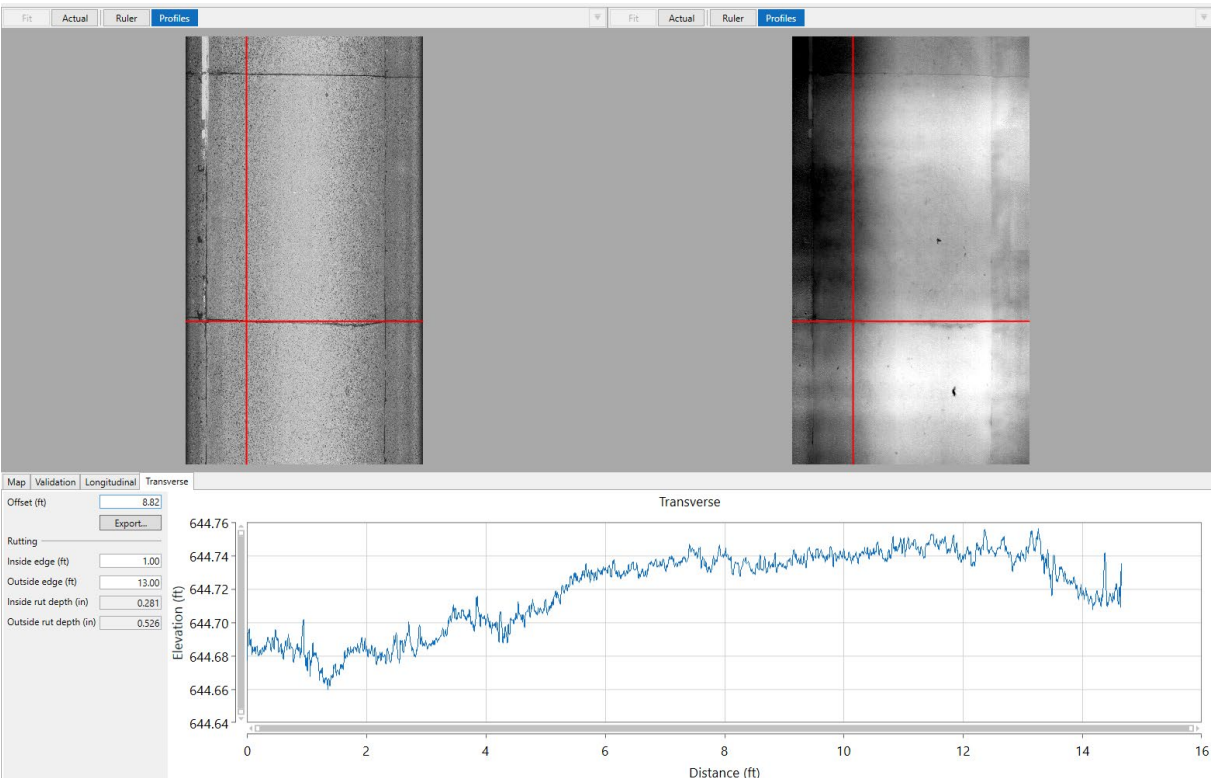

Offset


For the transverse profile, the offset is the distance from the bottom edge of the range image to the selected cross-hair.

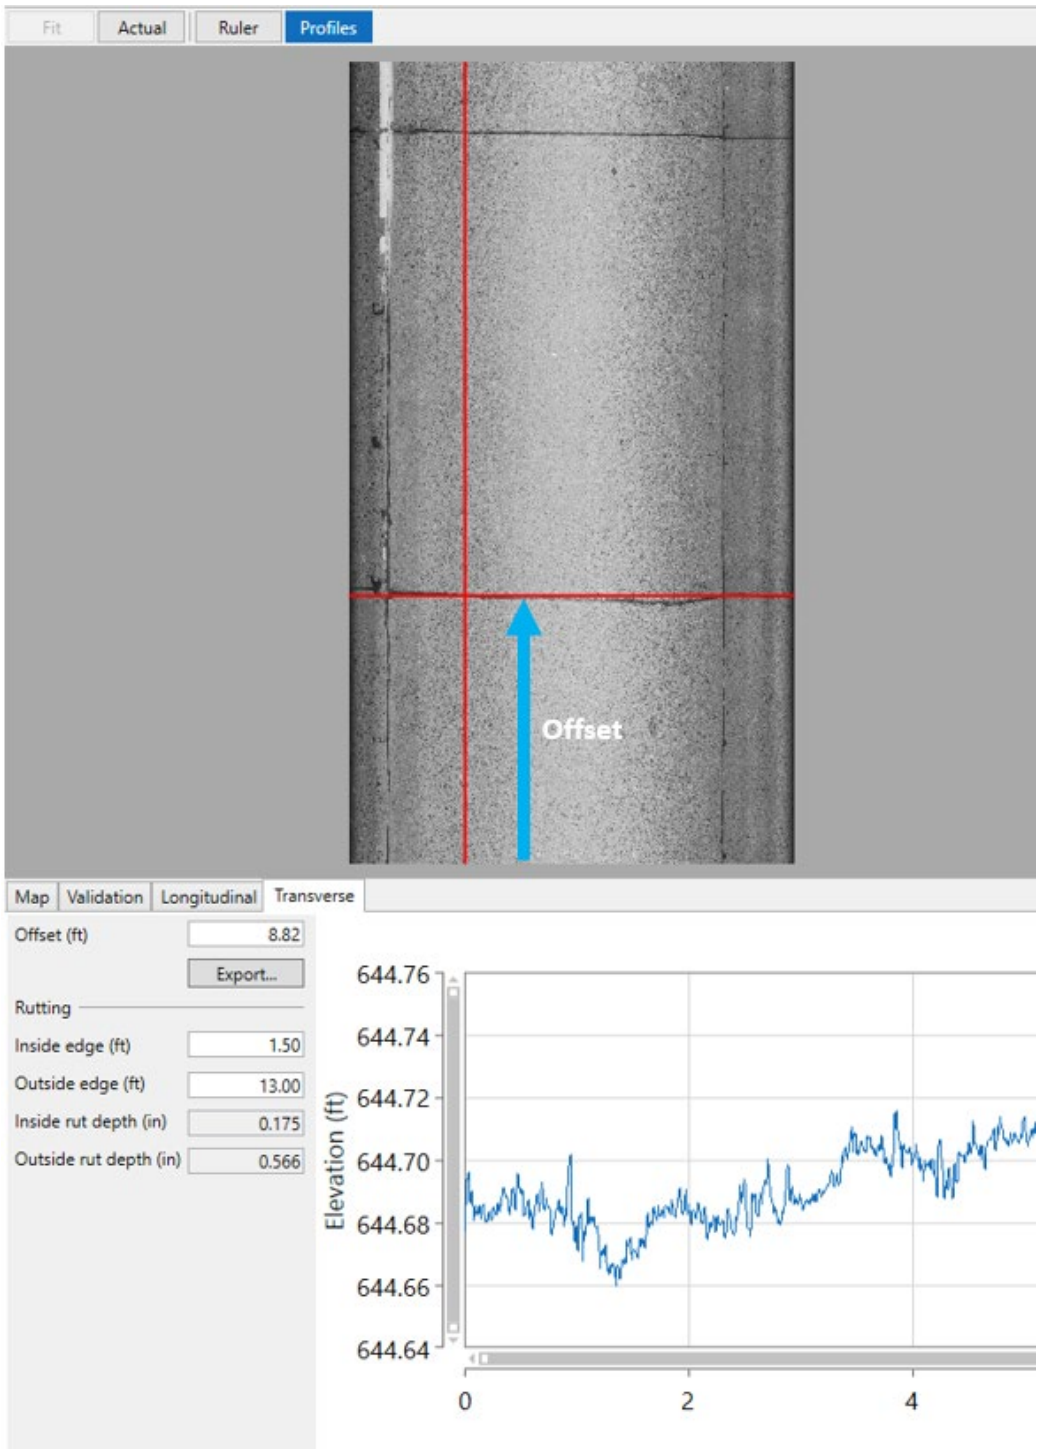




Export

Users can click the Export button to export the profile in the ASTM E2560 pavement profile (\*.ppf) format or tab-delimited file (\*.tsv) format. The transverse ppf file has not yet been imported to ProVAL.

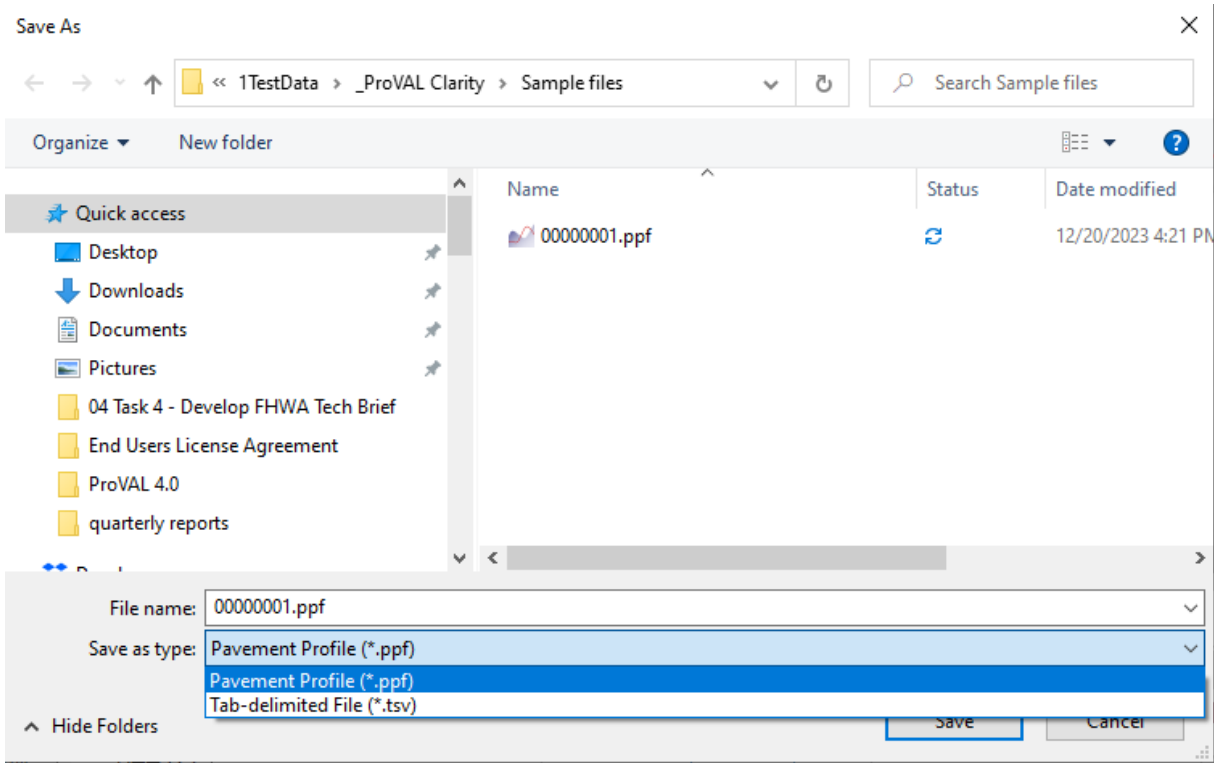

## Rutting


Users can input the inside edge and outside edge to allow the program to compute the inside wheel track's rut and outside wheel track's rut based on AASHTO R 87-18 (2022).

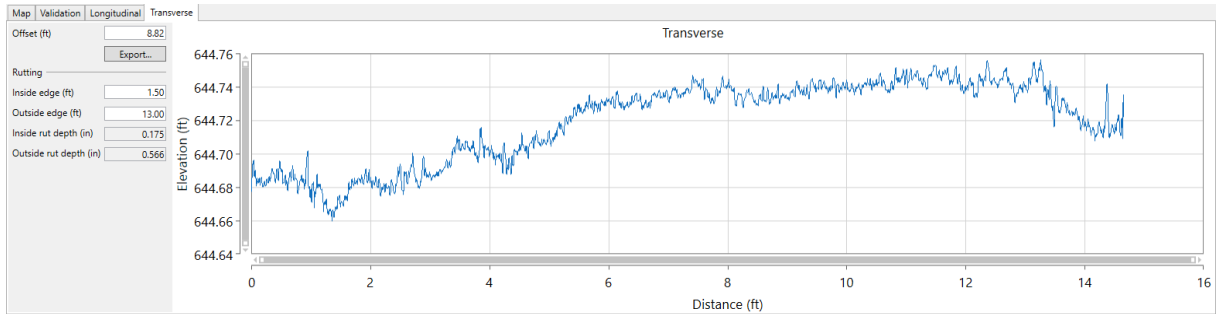

- ▶ Inside edge: user-defined inside edge of the lane.
- ▶ Outside edge: user-defined outside edge of the lane.
- ▶ Inside rut depth: calculated rut depth of the inside wheel track.
- ▶ Outside rut depth: calculated rut depth of the outside wheel track.


# View Valid and Invalid Data

Use the View menu to select viewing Valid data, Invalid data, or both.

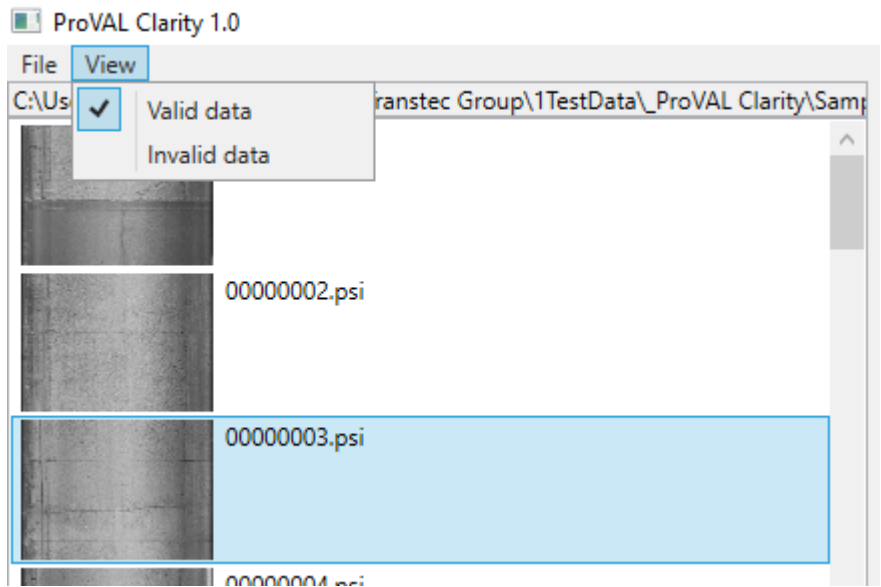

## **Valid Data only**

The following example is valid data only.

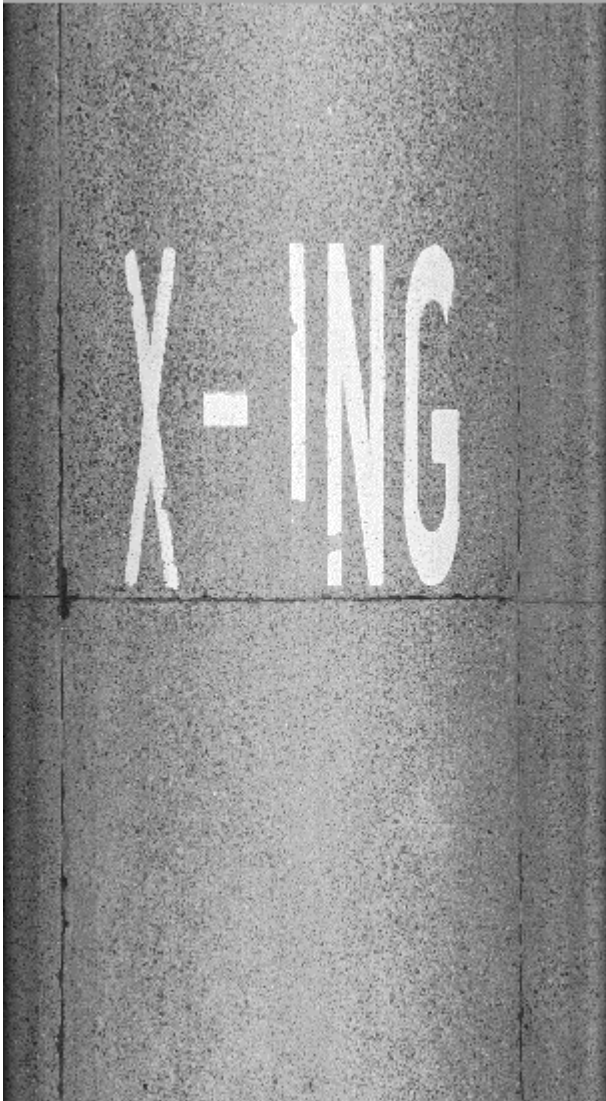


## Invalid Data only

The invalid data is shown as red dots in an intensity image.



## Both Valid Data and Invalid Data

The invalid data is shown as red dots in an intensity image.

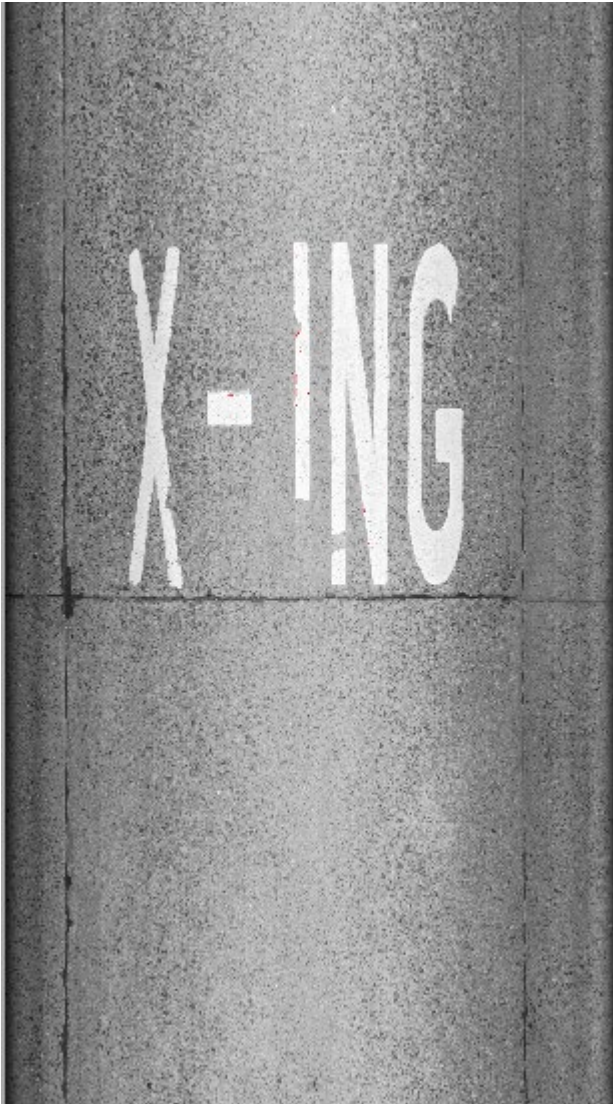

---

## BIBLIOGRAPHY

AASHTO (2022a), Standard Specification for Determining Pavement Deformation Parameters and Cross Slope from Collected Transverse Profiles, AASHTO Designation: R 87-18 (2022), American Association of State and Highway Transportation Officials.

AASHTO (2022b), Standard Specification for File Format of Two-Dimensional and Three-Dimensional (2D/3D) Pavement Image Data, AASHTO Designation: MP 47-22, American Association of State and Highway Transportation Officials.

AASHTO (2024), Standard Specification for File Format of Two-Dimensional and Three-Dimensional (2D/3D) Pavement Image Data, AASHTO Designation: MP 47-24, American Association of State and Highway Transportation Officials.

ASTM (2017). E2560. Standard Specification for Data Format for Pavement Profile. First published in 2005, ASTM International, West Conshohocken, PA, USA.

Tsai, Y., Wang, Z., and Liu, T. (2019) Evaluation of Proposed Standard Data Format and Compression Algorithms for 2D/3D Pavement Surface Image, Office of Technical Services FHWA Resource Center Pavement & Materials Technical Services Team, 2019.

Wang, K., Li, Q., and Chen, C. (2016b) Development of Standard Data Format for 2-Dimensional and 3-Dimensional (2D/3D) Pavement Image Data used to determine Pavement Surface Condition and Profiles, Task 3 - Evaluate Data Items and Formats. FHWA Contract DTFH6115P00103.

Wang, K., Li, Q., and Chen, C. (2016c) Development of Standard Data Format for 2-Dimensional and 3-Dimensional (2D/3D) Pavement Image Data used to determine Pavement Surface Condition and Profiles, Task 4 - Develop Metadata and Proposed Standards. FHWA Contract DTFH6115P00103.

Wang, K., Li, Q., and Chen, C. (2016a) Development of Standard Data Format for 2-Dimensional and 3-Dimensional (2D/3D) Pavement Image Data used to determine Pavement Surface Condition and Profiles, Task 2 - Research Current Practices. FHWA Contract DTFH6115P00103. AASHTO M 331-17 Standard Specification for Smoothness of Pavement in Weigh-in-Motion (WIM) Systems.

# END USER LICENCE AAGREEMENT

## License Agreement

**ProVAL** Clarity (hereinafter the "SOFTWARE") is protected by Title 17 United States Code, Copyrights. The Transtec Group, Inc., 6111 Balcones Drive, Austin, TX, 78731, (hereinafter "TRANSTEC") grants you (hereinafter the "USER") a nonexclusive, nontransferable license to use the program and any accompanying documentation (collectively referred to hereafter as the "SOFTWARE") in accordance with the terms and conditions of this License Agreement and Terms of Use.

The USER shall not copy or redistribute the SOFTWARE (or any part thereof) for any reason without the prior written permission of TRANSTEC.

TRANSTEC provides the SOFTWARE "as is" and "with all faults" without any express or implied warranties whatsoever. Because of the diversity of hardware and software configurations under which this SOFTWARE may be installed and used, no warranty of merchantability, performance, or fitness for a particular purpose is offered. The USER shall test the software thoroughly before relying on it. The USER assumes the entire risk of using the software.

TRANSTEC and its affiliates and agents shall not be liable for any damages whatsoever (including but not limited to loss of money) resulting from the use of this SOFTWARE.

## Terms of Use

### End USER License Agreement

By installing or using the SOFTWARE, you (the USER) indicate your complete and unconditional acceptance of these terms and conditions. If you (the USER) do not agree to the terms and conditions of this agreement, promptly remove the SOFTWARE from your computer and destroy the associated documentation.

Should there be any conflict between the terms and conditions of this agreement and the terms and conditions of any other agreement between you (the USER) and TRANSTEC or their agents in relation to the SOFTWARE, the terms and conditions of this agreement shall apply.

If any provision of this agreement is found to be unlawful or void, then that provision shall be severed from this agreement and will not affect the validity of the remaining provisions.

Information contained in the SOFTWARE is subject to change without notice and does not represent a commitment or contracted obligation on the part of TRANSTEC.

This License Agreement (including the SOFTWARE) is not transferable. You (the USER) may not lend, loan, lease, rent, sell, or distribute the SOFTWARE (or copies) in any form.

## Limitations of Use

You (the USER) are expressly forbidden from making alterations or modifications to, merging, adapting, decompiling, disassembling, reverse engineering, or attempting to discover the source code without the expressed written permission from TRANSTEC.

## Limitations of Liability

Under no circumstances, including, but not limited to, negligence, shall TRANSTEC, or its affiliates and agents be liable for any direct, indirect, incidental, special, or consequential damages that result from the use of, or the inability to use, the SOFTWARE. You (the USER) release TRANSTEC and its affiliates and agents from any damages that you incur and agree not to assert any claims against

them arising from your use of the SOFTWARE.

#### Disclaimer

TRANSTEC may have provided links and pointers to Internet sites maintained by third parties. Neither TRANSTEC nor its affiliates and agents operate or control in any respect any information, products or services on these third-party sites. The materials in this SOFTWARE and any third-party sites are provided "as is" and without warranties of any kind, either expressed or implied. To the fullest extent permissible pursuant to applicable law, TRANSTEC disclaims all warranties, expressed or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. TRANSTEC does not warrant that the functions contained in the materials will be uninterrupted or error-free and that defects will be corrected.